

DESCRIPTION



W960IYX00 YELLOW



W960IRX00 RED



W960IWX00 WHITE



W960IBB00 BLACK



W960IQX00 HIGH VISIBILITY YELLOW



High density and shock resistant ABS/PC shell.

Four durable head lamp holders.

Universal 30 mm slots for hearing protection.

Visor compatible.


Headband with UNI size 53-63 cm.

Extra durable size adjustment mechanism.


Quick fastening and opening buckle with a safety release system in compliance with EN 397.

KEY FEATURES

The helmet construction without EPS which provides well fitting to any head and superb durability.




two side and two rear adjusting sleeves to regulate the length of the chin straps



side universal 30 mm slots for hearing protection: Peltor, Hellberg, 3M...




thin profile buckle fits well with all hearing protectors




fast, easy and effective size adjustment mechanism on the back of the helmet



four head lamp holders for any head lamp available on the market



reflective stickers included



Side impact force protection according to EN 12492

STANDARDS



EN 397
CE 1015





min. 15 kg
max. 25 kg



440 V
a. c.



-30 °C



EN 397
EN 12492

FEATURES



455 g
16.05 oz




53-63cm




unique
number

MATERIALS

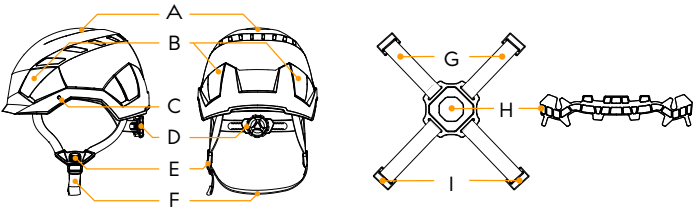

- A. shell
- B. headlamp holders
- C. headband
- D. size adjustment mechanism
- E. buckle
- F. chinstrap
- G. retention straps
- H. removable padding
- I. retention straps holders



COMPATIBILITY WITH SHIELDS



Singing Rock
COVER visor



Hellberg Safe 2 flex carrier
+
Steel or Nylon mesh visor
or
Polycarbonate electric visor

RELATED PRODUCTS

HELMET TYPE	COLORS	STANDARDS						
FLASH Access		CE 1015	min. 50 kg	440 V a. c.	-30 °C	✓	✗	✓
FLASH Aero		CE	min. 50 kg	✗	-10 °C	✗	✓	✓

MAINTENANCE

Lifetime of this product depends on the frequency and the environment in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 10 years from the date of production.

However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.

-30 / +50 °C

washing

drying

beware of
UV

beware of
chemicals

read
instruction

NOTES

+

+

+